

FOLLOW THESE STEPS WHEN APPLYING

PAZ PUMP ACTION TAGS™

Knowing your PAZ pump action tagger™

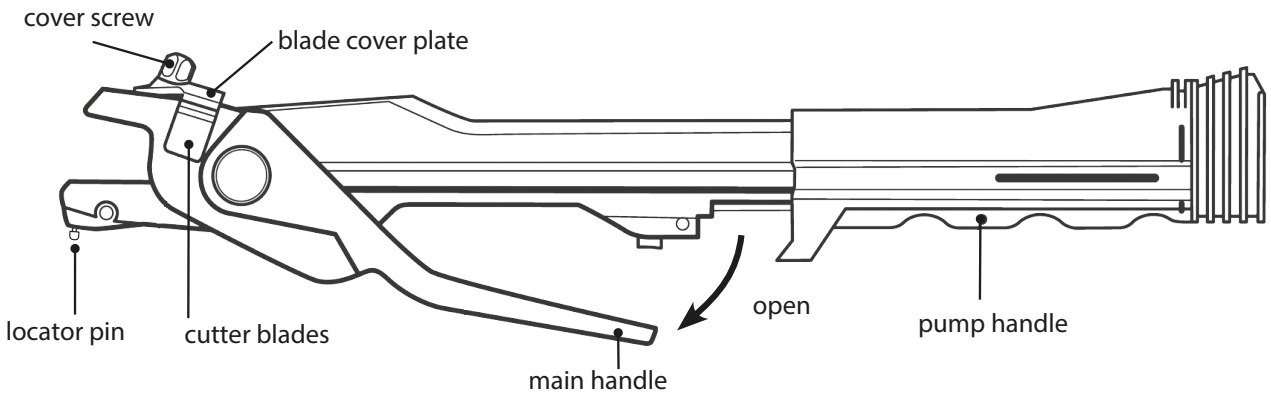

Opening the tagger

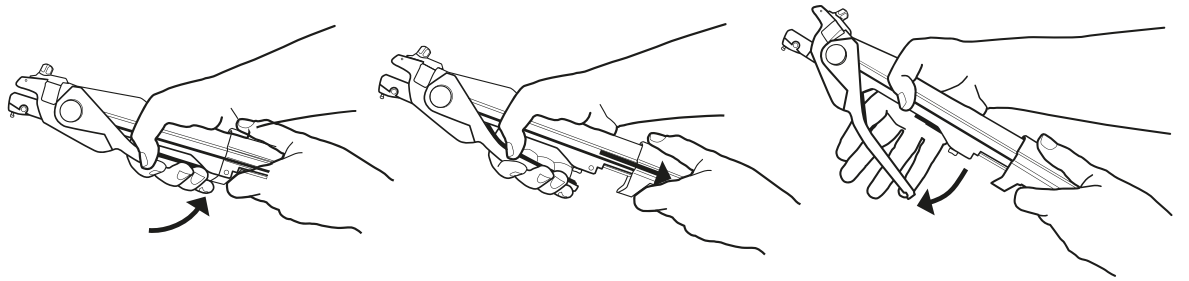


1. Squeeze main handle

2. Pull pump handle back

3. Release main handle

Loading a full strip of PAZ pump action tags™

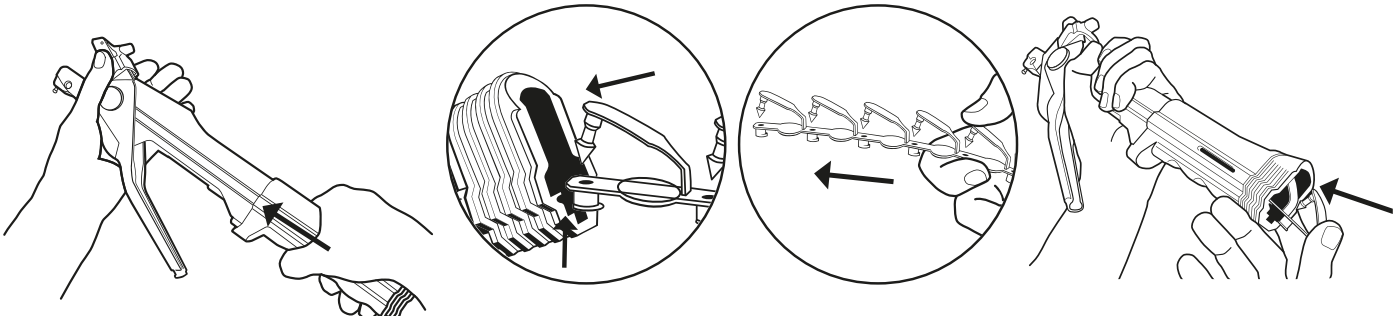

1. Push pump handle forward


2. Load the tagger by sliding a strip of tags up the barrel. Boss under tag fits bottom groove

3. Feed strip of tags into handle until flush with end


FOLLOW THESE STEPS WHEN APPLYING

PAZ PUMP ACTION TAGS™

Positioning the first tag for use

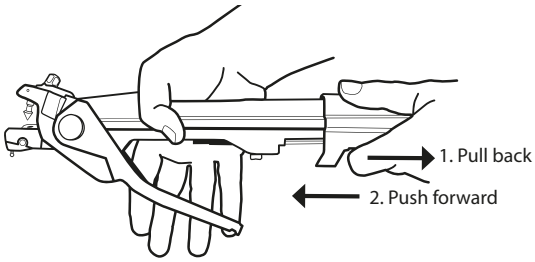


To position the first tag, pull the pump handle back and then fully forward.
Now the tag is ready to apply.

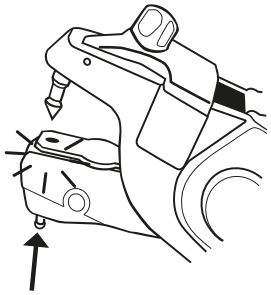


IMPORTANT:
Ensure boss on tag strip base snaps onto locator pin.

Loading just one or two tags

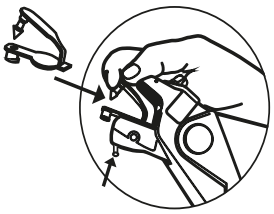


1. Insert tag from the front.
2. Fit tag onto locator pin.
3. Now the tag is ready to apply.

Removing tags

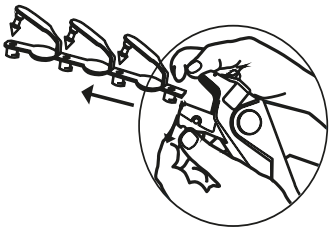


1. Move pump handle back.
2. Pull down locator pin.
3. Pull tag strip out forwards.

Replacing cutter blades



1. Undo cover screw and flip up blade cover plate.



2. Pop out cutter blades sideways.
3. Insert new cutter blades* lining up lugs and notches.
4. Flip down blade cover plate and tighten cover screw - not too tight.

CAUTION: THE CUTTER BLADES ARE VERY SHARP
* One set of spare cutter blades included.

www.ztags.com

© Datamars Ltd 2021

2013ZT00182W